

ADDENDUM NO. 1
WATER SYSTEM IMPROVEMENTS
CONTRACT 15-01
CLARKRANGE 200,000 GALLON WATER STORAGE TANK
FENTRESS COUNTY UTILITY DISTRICT
JRWCO JOB NO. 1955

Date of Addendum: Friday, January 29, 2016
Bid Opening: Thursday, February 4, 2016, 2:00 p.m. C.S.T.

1. Detailed Specifications, Section 5. Elevated Water Storage Tank, Paragraph 10. Painting (Coating), Subparagraph e. Interior Coating System, Subheading Interior Coating System ICS-5, Page DS 5-9:

Add Sherwin Williams products as follows:

- | | | |
|-----|----------------------------|---|
| (1) | Shop Prime Coat | Tnemec Series 94 H ₂ O Hydro Zinc <i>or</i>
<i>Sherwin Williams Corothane 1</i>
<i>Galvapak 1K or 2K Zinc</i> |
| (2) | Field Prime Coat | Tnemec 94 H ₂ O Hydro Zinc or Series
91 H ₂ O Hydro Zinc <i>or</i>
<i>Sherwin Williams Corothane 1</i>
<i>Galvapak 1K or 2K Zinc</i> |
| (3) | Stripe Coat | Tnemec Series 20-15BL Pota-Pox <i>or</i>
<i>Sherwin Williams Macropoxy 646 PW</i> |
| (4) | Field Intermediate
Coat | Tnemec Series 20-1255 <i>or</i>
<i>Sherwin Williams Macropoxy 646 PW</i> |
| (5) | Field Finish Coat | Tnemec Series 20-15BL Pota-Pox <i>or</i>
<i>Sherwin Williams Macropoxy 646 PW</i> |

Add: "***Successive coats of the same product or color shall be tinted to differentiate same.***"

2. Detailed Specifications, Section 5. Elevated Water Storage Tank, Paragraph 10. Painting (Coating), Subparagraph f. Exterior Coating System OCS-4, Page DS5-11:

Add Sherwin Williams products as follows:

Exterior Three Coat Fluoropolymer System


- | | | |
|-----|----------------------------|---|
| (1) | Shop Prime Coat | Tnemec Series 94 H ₂ O Hydro Zinc <i>or</i>
Sherwin Williams Corothane 1
Galvapak 1k Zinc |
| (2) | Field Prime Coat | Tnemec 94 H ₂ O Hydro Zinc or Series
91 H ₂ O Hydro Zinc <i>or</i>
Sherwin Williams Corothane 1
Galvapak 1k or 2k Zinc |
| (3) | Field Intermediate
Coat | Tnemec Series 73-color Endura-Shield
<i>or</i> Sherwin Williams Acrolon 218 SG
Urethane |
| (4) | Field Finish Coat | Tnemec Series 700 Hyrdoflon <i>or</i>
Sherwin Williams Flourokem HS |

Add: ***“Successive coats of the same product or color shall be tinted to differentiate same.”***


3. PLANS, Sheet 2:

Add note to “Cut and Plug 8-inch DIP Line and Install Kicker” as per the attached 8 ½” x 11” plan sheet.

J. R. WAUFORD & COMPANY,
CONSULTING ENGINEERS, INC.

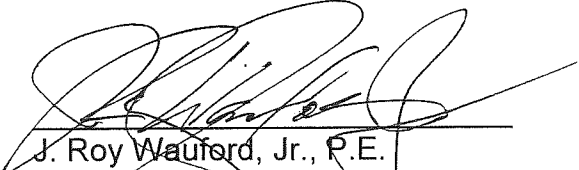

J. Roy Wauford, Jr., P.E.
Tennessee License No. 2792

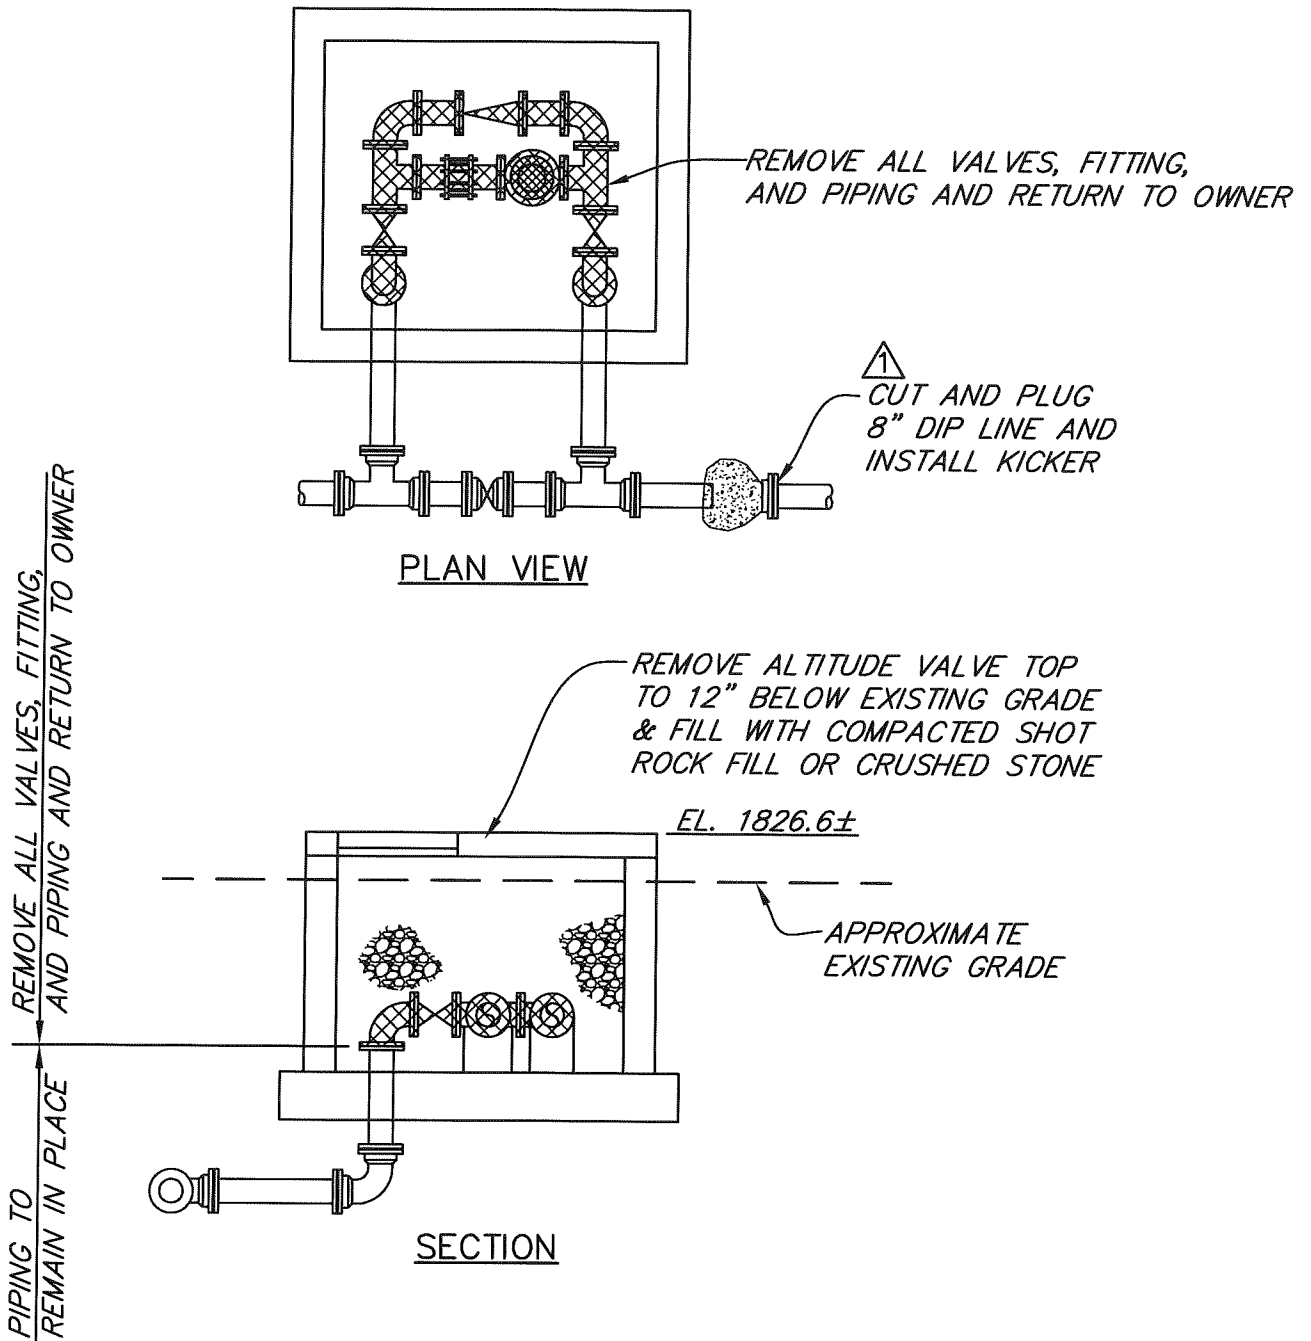

ALTITUDE VALVE PIT
 SCALE: 1/4" = 1'-0"

SHEET 2 OF 2 REVISIONS ▲ ADDENDUM NO. 1 1/29/2016 AWR	WATER SYSTEM IMPROVEMENTS CONTRACT 15-01 CLARKRANGE 200,000 GALLON ELEVATED WATER STORAGE TANK		
	PROPOSED TANK AND DEMOLITION OF EXISTING FACILITIES		
FOR FENTRESS COUNTY UTILITY DISTRICT JAMESTOWN, TENNESSEE			
APPROVED _____ _____	SCALE AS SHOWN DATE DEC. 2015	J. R. WAUFORD & CO. CONSULTING ENGINEERS, INC. NASHVILLE, TENNESSEE JOB NO. 1955	DESIGNED JRW DRAWN AWR CHECKED JRW